


NOTES:

1. FOR ASSEMBLY INSTRUCTIONS REFER TO AD-2604.
2. MAKE SURE THE LOOP ITEM # 3, 6, 7, 8, 9, 10, 11, IS NOT BENT PRIOR TO INSTALLING. LOOP SHOULD NOT TOUCH CENTER CONDUCTOR OF NEXT HIGHER ASSEMBLY.
3. THE CAPACITOR (ITEM# 4), NEEDS TO BE SOLDERED WITH A TEMPERATURE REGULATED IRON AT 574°.

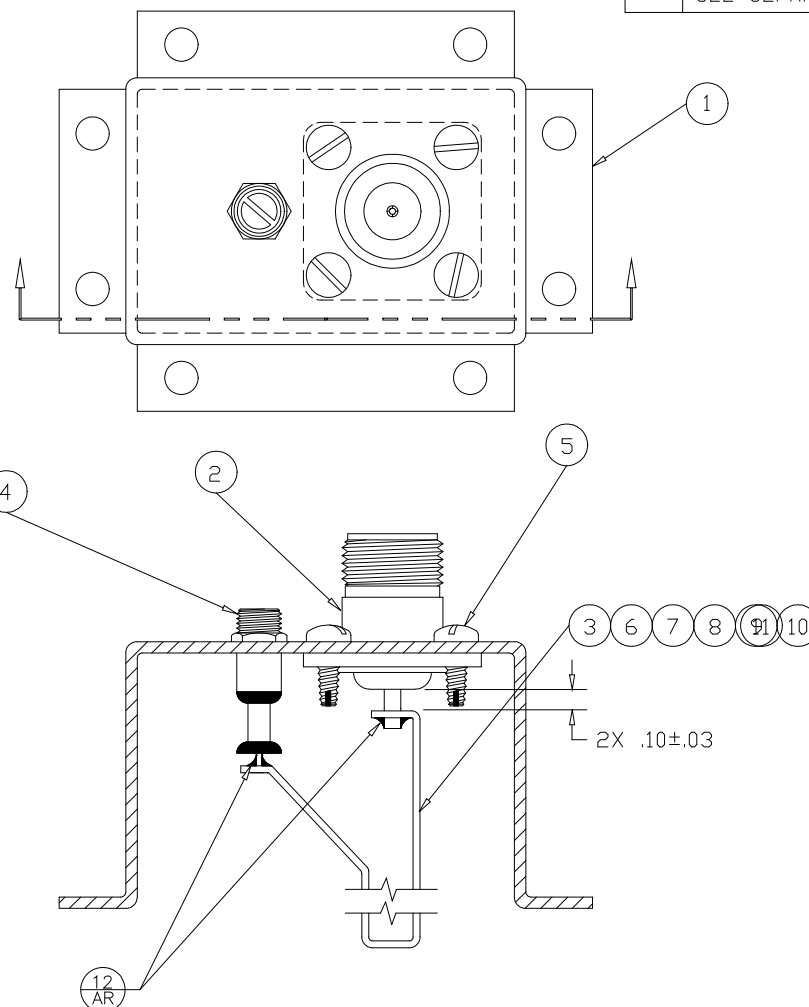

REVISIONS			
REV.	DESCRIPTION	DATE	APP.
	SEE SEPARATE SHEET FOR REVISIONS		

SEE SEPARATE LIST OF MATERIALS

UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN INCHES. INTERPRET DIM & TOL PER ASME Y14.5M-1994			MATERIAL: N/A		FINISH: N/A		ALLEN TELECOM DECIBEL PRODUCTS		DECIBEL PRODUCTS 8635 STEMMONS FRWY. DALLAS, TEXAS 75356-9610				
FRACTION:	DECIMAL:	ANGLE:	DRAWN BY: TM		DATE: 09-13-76		TITLE: ENCLOSURE SUBASSEMBLY 8 INCH CAVITY						
±1/32	.XXX = ±.005 .XX = ±.01	±.5°	CHKD.: RH		DATE: 10-22-76								
			ELEC. ENG.: N/A		DATE: N/A		SIZE B						
			MECH. ENG.: N/A		DATE: N/A								
			MFR. ENG.: N/A		DATE: N/A								
			RELEASED: EW		DATE: 10-29-76		DRAWING No.		048510-001/007		REV. H		
SEE WHERE USED			REMOVE ALL BURRS AND SHARP EDGES. PART SHALL CONFORM TO DB STANDARD PRACTICES.					DO NOT SCALE DRAWING				SHEET 1 OF 3	
NEXT ASSEMBLY													

This Document is Proprietary Information of Decibel Products, a division of the Allen Telecom Group. THE USE, REPRODUCTION OR DUPLICATION OF THIS DOCUMENT IS STRICTLY PROHIBITED WITHOUT WRITTEN PERMISSION OF DECIBEL PRODUCTS MANAGEMENT.